

RGB cob strip :



Product introduction:

- High CRI：Ra＞90 R9＞60
- 100lm per W
- Beam angle 180°
- 12/24VDC
- 8mm/10mm FPC
- It can be cut along the cutting position

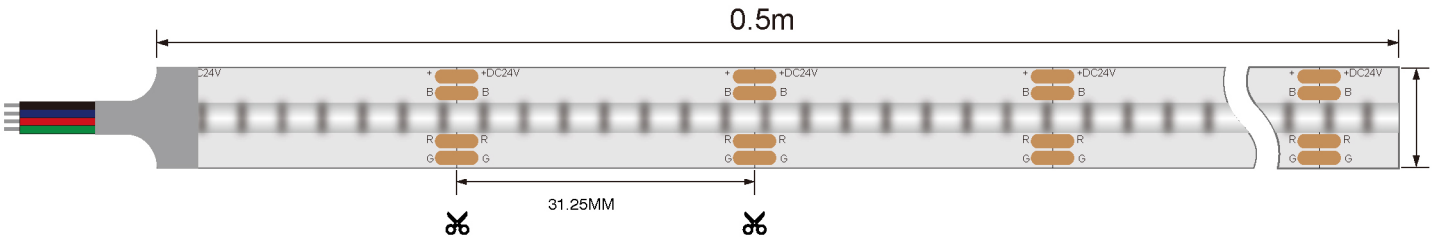







PEREL OY

Single white color cob strip :

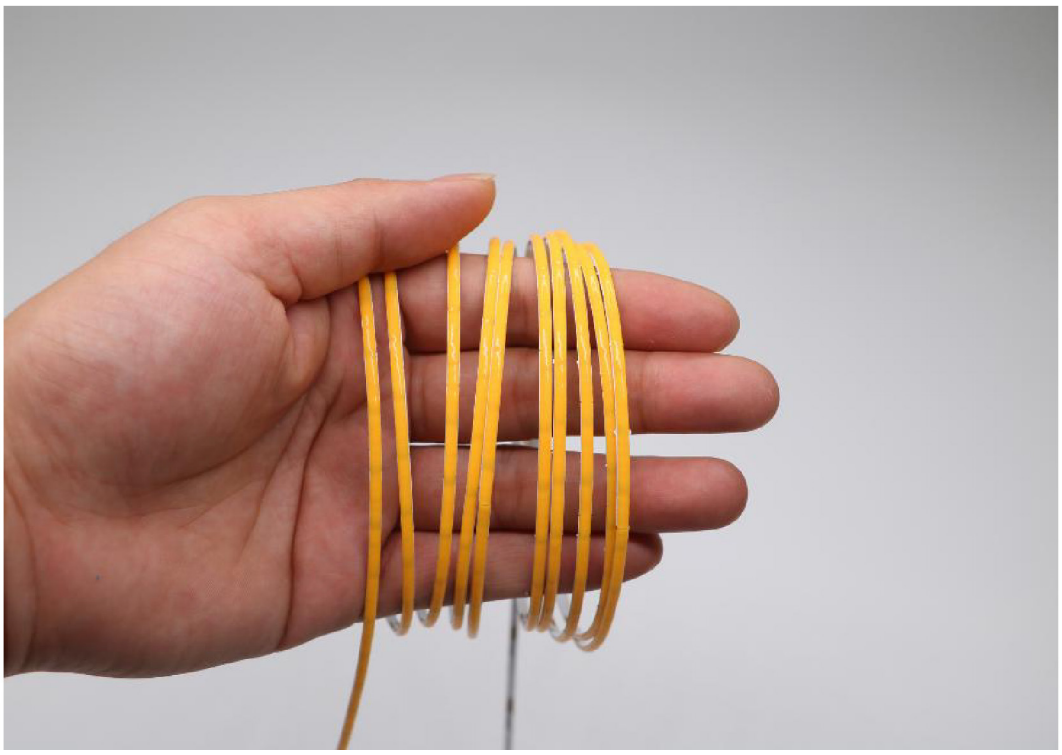


Product introduction:

- High CRI：Ra＞90 R9＞60
- 100lm per W
- Beam angle 180°
- 12/24VDC
- 2.7mm/3mm/5mm FPC
- It can be cut along the cutting position

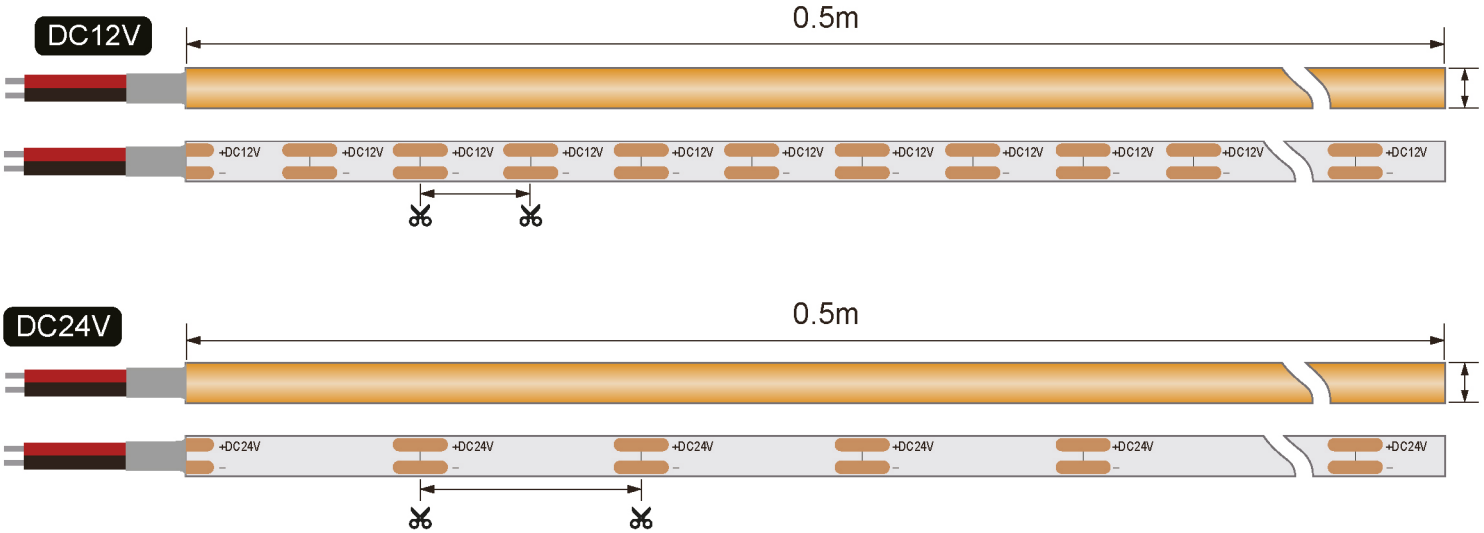


PEREL OY


Parameters :




Model No.	COB-576-12/24V-5MM	Color	2700K 3000K 4000K 6000K R G B
Voltage	DC12/24V	IP Rate	IP 20 IP 65 IP 67 IP 68
Power	10W/m	PCB Color	White
LED Qty./m	576LEDs/m	Net Weight	150g/Roll
PCB Width	5mm	Cut Length	31.25mm/62.5mm
CRI	Ra>90	Packing	5m/Roll
lm/m		Beam Angle	180°




Model No.	COB-480-12/24V-2.7MM	Color	2700K 3000K 4000K 6000K R G B
Voltage	DC12/24V	IP Rate	IP 20 IP 65 IP 67 IP 68
Power	4W/m	PCB Color	White
LED Qty./m	480LEDs/m	Net Weight	150g/Roll
PCB Width	2.7mm	Cut Length	25mm/50mm
CRI	Ra>90	Packing	5m/Roll
lm/m	400lm/m	Beam Angle	180°




Model No.	COB-384-12/24V-3MM	Color	2700K 3000K 4000K 6000K R G B
Voltage	DC12/24V	IP Rate	IP 20 IP 65 IP 67 IP 68
Power	7W/m	PCB Color	White
LED Qty./m	384LEDs/m	Net Weight	150g/Roll
PCB Width	3mm	Cut Length	20.83mm/41.66mm
CRI	Ra>90	Packing	5m/Roll
lm/m	700lm/m	Beam Angle	180°



Model No.	COB-400-12/24V-3MM	Color	2700K 3000K 4000K 6000K R G B
Voltage	DC12/24V	IP Rate	IP 20 IP 65 IP 67 IP 68
Power	7W/m	PCB Color	White
LED Qty./m	400LEDs/m	Net Weight	150g/Roll
PCB Width	3mm	Cut Length	10mm/20mm
CRI	Ra>90	Packing	5m/Roll
lm/m	700lm/m	Beam Angle	180°




Model No.	COB-384-12/24V-5MM	Color	2700K 3000K 4000K 6000K R G B
Voltage	DC12/24V	IP Rate	IP 20 IP 65 IP 67 IP 68
Power	10W/m	PCB Color	White
LED Qty./m	384LEDs/m	Net Weight	150g/Roll
PCB Width	5mm	Cut Length	20.83mm/41.66mm
CRI	Ra>90	Packing	5m/Roll
lm/m	1000lm/m	Beam Angle	180°




Model No.	COB-400-12/24V-5MM	Color	2700K 3000K 4000K 6000K R G B
Voltage	DC12/24V	IP Rate	IP 20 IP 65 IP 67 IP 68
Power	10W/m	PCB Color	White
LED Qty./m	400LEDs/m	Net Weight	150g/Roll
PCB Width	5mm	Cut Length	10mm/20mm
CRI	Ra>90	Packing	5m/Roll
lm/m	1000lm/m	Beam Angle	180°

Instalation diagram for RGB cob strip :

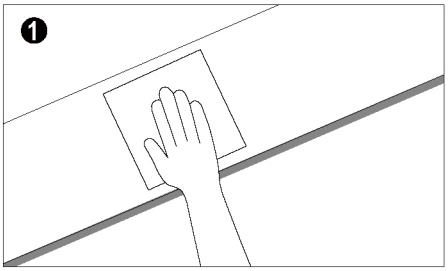


Clean the installation surface

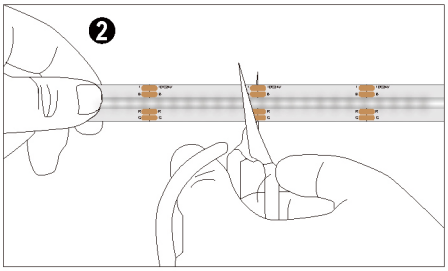


Measure the length you need toinstall, cut at the nearest scissor mark line.

For the left led strip, weld at the next scissor mark to connect with other connection wire.

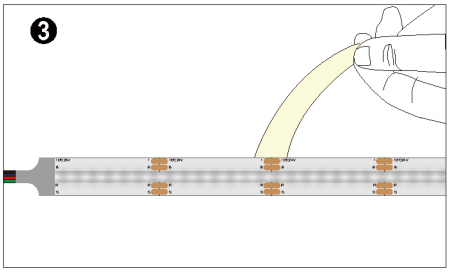


Tear off the double-sided adhesive tape on the back and paste it in a suitable position

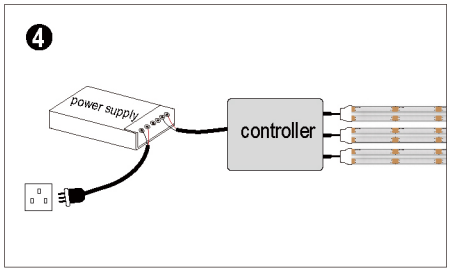


Connect the GRB light belt line to the output port of the controller

Connect the input terminal line of the controller to the power supply, (positive pole to positive pole, negative pole to negative pole)

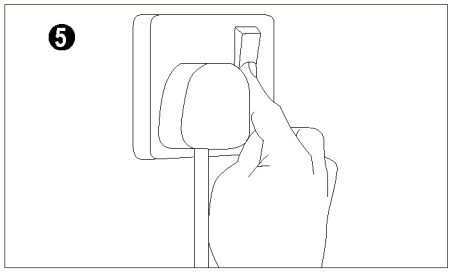


Turn on the power switch after confirming that the line is connected

Instalation diagram for Single color cob strip :

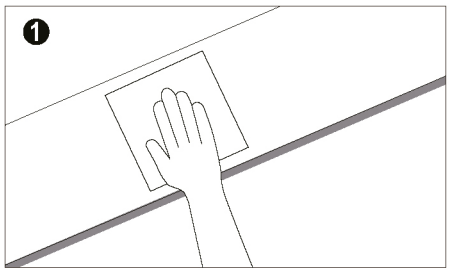


Clean the installation surface

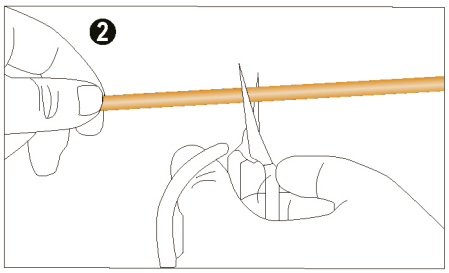


Measure the length you need toinstall, cut at the nearest scissor mark line.


For the left led strip, weld at the next scissor mark to connect with other connection wire.

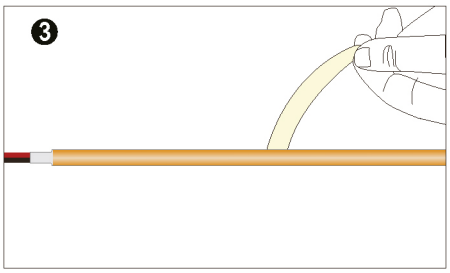

Tear off the double-sided adhesive tape on the back and paste it in a suitable position

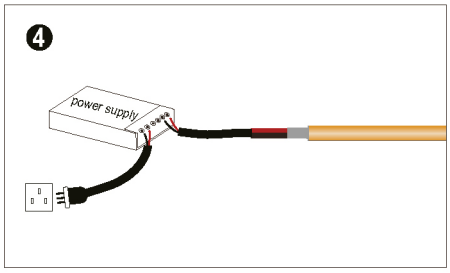

Connect the light strip wire to the driver output port (positive pole to positive pole, negative pole to negative pole)

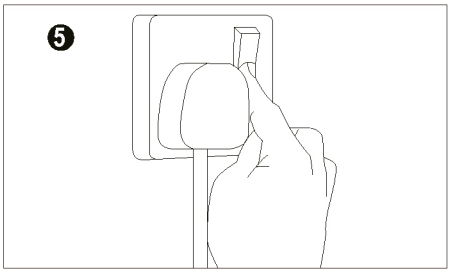

Turn on the power switch after confirming that the line is connected

PEREL OY Valaistustuotteet: Jari Korhonen / jari.korhonen@perel.fi / puh. 0198711523
Torpankatu 28, PL 230, 05801 Hyvinkää / p. 019 87 111 / info@perel.fi / www.perel.fi